

Monitor - NSM

LCD monitor with high resolution and superb graphics.

The monitor can be used with all electronic targets from Kongsberg Mikroelektronikk AS.


The monitor casing is produced in steel. To protect the display a special anti-reflective glass is mounted in front of the display.

A built-in smart-card reader can be used as the "key" to get access to the system.

The monitor stand enables the shooter to position and adjust the monitor to an optimal position.

Logical menus makes operation easy. In addition to presentation of the hit, the average hit point, x/y position and scattering, etc. can all be presented.

The monitor also enables zooming as well as printing (provided a printer is connected to the system).

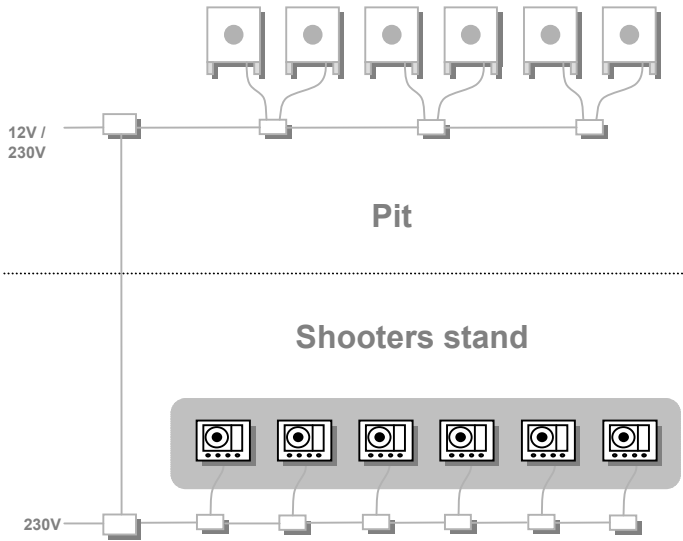

Recommended use :

- All systems delivered by Kongsberg Mikroelektronikk

Technical data :

Dimensions:

LCD screen	9,4"
Width	290 mm
Height with stand	290 mm
Max depth	105 mm
Min depth	45 mm

Weight incl. stand 4,0 Kg

Temperature range usage - 5°C to + 50°C

Temperature range storage - 20°C to + 70°C

Power usage Max 12W

Supplementary Equipment :

- Monitor stand.
- Smart-card (key card).
- Monitor cable (various lengths).




Electronic Target Systems
 6 South Farm Court
 Budleigh Salterton
 Devon EX9 7AY
 01395 442777 (Office)
 0208 878 1716 (Technical)
 01395 446233 (Fax)
 Email: info@etsys.co.uk