

Target model U2E

Target from Kongsberg Mikroelektronikk AS, designed for 100-200m ranges with high calibrated ammunition and 50m running boar with .22LR.


Normal aiming points and animal targets can be mounted.

The target frame is made of solid wood.

3 sensors are mounted at the bottom of the target, with the inspection opening in front.

The lowest 20 cm of the acoustic measuring chamber, has to be covered in front in order to secure the sensors.

The target has an adjustable horizontal rubber band to seal the acoustic chamber.

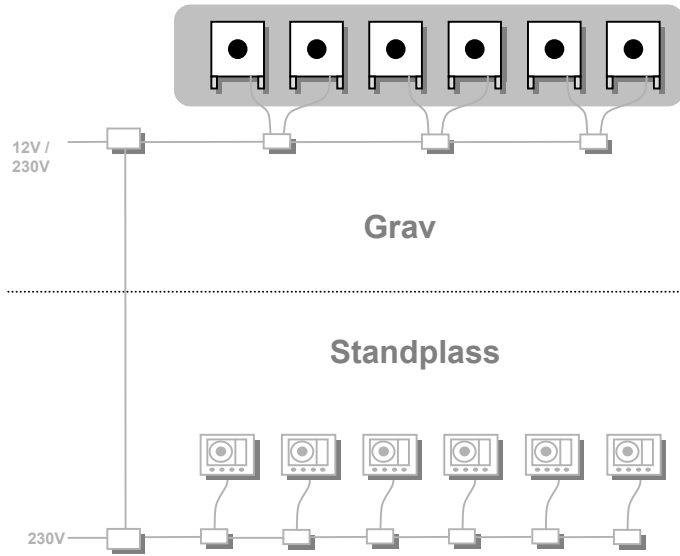


Recommended use :

- 100m – 200m (high calibrated ammunition).
- 50m running boar (.22LR)

Technical :

Dimensions:

- A 1160 mm
- B 1300 mm
- C 500 mm
- D 300 mm
- E 70 mm
- F 47 mm
- G 120 mm

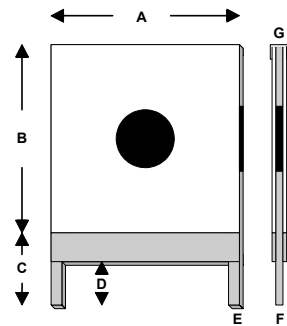


Temperature range -30 til + 60°C

Horizontal rubber band 3 x 400 mm

Weight..... Approx. 30 kg

Supplementary equipment :

- 50m running boar

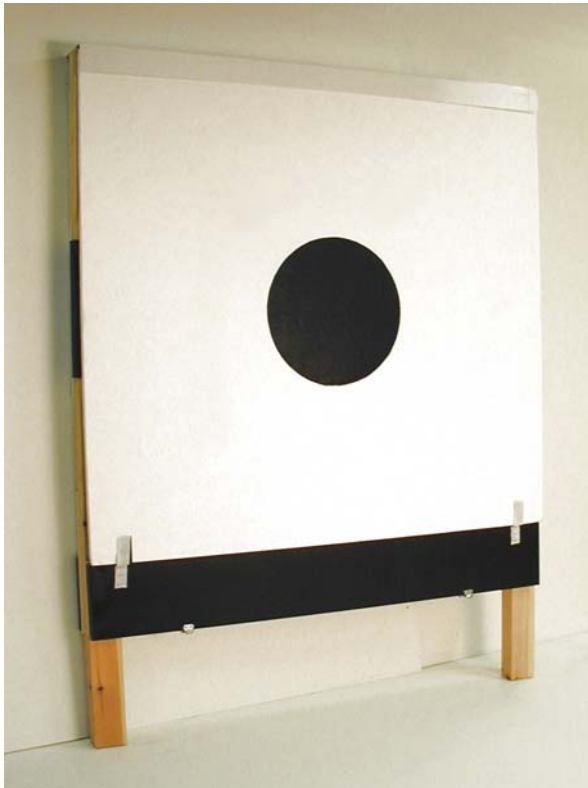

Electronic Target Systems
 6 South Farm Court
 Budleigh Salterton
 Devon EX9 7AY
 01395 442777 (Office)
 0208 878 1716 (Technical)
 01395 446233 (Fax)
 Email: info@etsys.co.uk